



1-800-283-6266

Phone: (713) 466-1449 Fax: (713) 466-1703
E-Mail: customerservice@enconsafety.com



COMBINATION SHOWER/ EYEWASH WITH SS BOWL


PART NUMBER: 01050232

SPECIFICATION:

Third party certified to ANSI Z358.1, the combination shower and eyewash shall deliver 30 gpm (113.6 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from the shower head and 2.4 gpm (9.1 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from the eyewash. Unit shall provide a non-injurious stream of water for 15 minutes or longer. Combination unit shall be supplied with stainless steel (SS) single motion activation stay open ball valves with SS balls. Valve sizes: shower 1", eyewash 1/2". Unit shall include SS actuators with actuation graphics, type 304 schedule 40 stainless steel piping and 1 1/4" supply/waste connection with flanged floor mounting plate for free-standing installation. Shower head shall be supplied with self-adjusting 30 gpm (113.6 lpm) regulator. Eyewash to be supplied with self-adjusting 2.4 gpm (9.1 lpm) regulator on the eyewash to assure a constant and even dual stream flow pattern under 30/70 psi (206.8/482.6 kPa) hydraulic conditions. Shower head to be manufactured of UV resistant high visibility yellow ABS plastic. Shower head must deliver a minimum of 20" (50.8cm) diameter pattern to the target area 60" (152.4cm) above standing level. Eyewash heads with integral hinged covers to be manufactured of solvent resistant acetal mounted on a chrome plated brass wye in a type 304 SS bowl. Eyewash covers are provided to inhibit dust and/or contamination when not in use. Combination units that provide improper flow pattern or contain deteriorating screens/filters are not acceptable. Combination unit shall be Encon Safety Products Model 01050232.

MATERIALS OF CONSTRUCTION:

- PIPING:** Type 304 schedule 40 stainless steel.
- VALVES:** Stainless steel stay open ball valves with stainless steel balls, stainless steel push plate with actuation graphic (eyewash) and stainless steel pull rod assembly with actuation graphic (shower). Valve sizes: shower 1", eyewash 1/2".
- SHOWER HEAD:** Yellow ABS plastic shower head.
- EYEWASH HEAD:** Acetal dual stream heads with integral hinged covers and chrome plated brass wye assembly.
- BOWL:** Type 304 stainless steel.
- REGULATOR:** Self-adjusting 30 gpm (113.6 lpm) shower and (2) 1.2 gpm (4.5 lpm) eyewash regulators.
- SUPPLY:** 1 1/4" NPT
- WASTE:** 1 1/4" NPT
- WEIGHT:** 60 lbs (27.21 kgs)

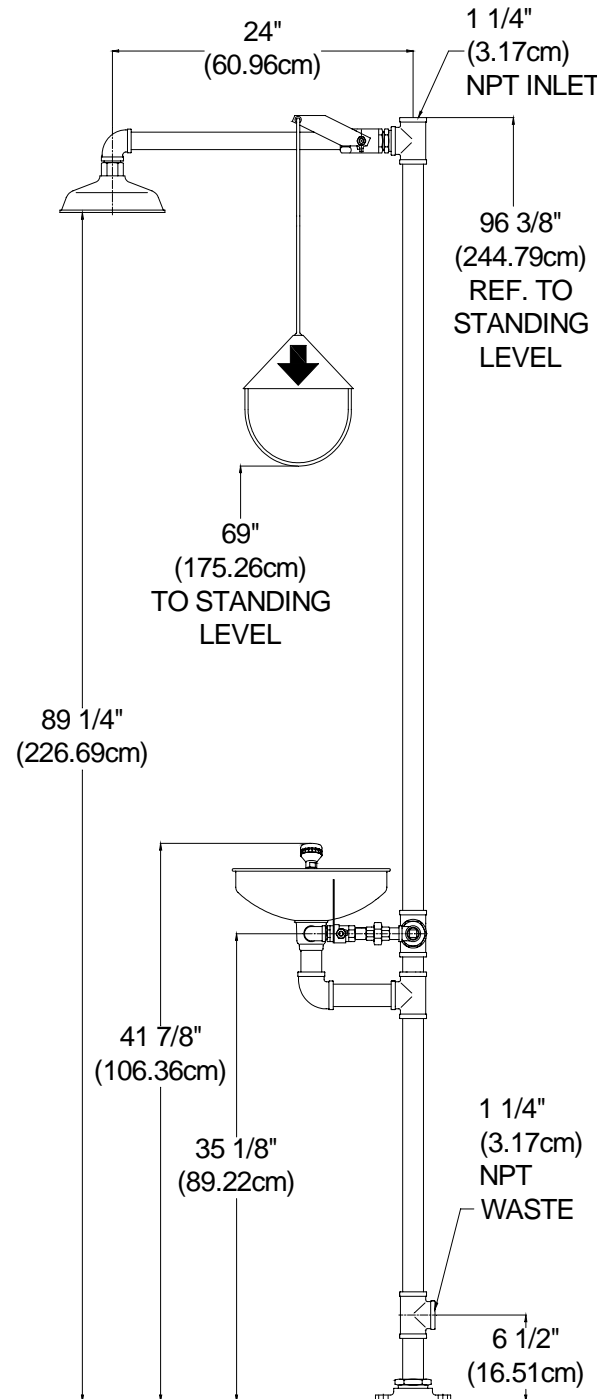

MODEL #	DESCRIPTION
01050232	Unit as Specified