

Encon[®]
SAFETY PRODUCTS

1-800-283-6266

Phone: (713) 466-1449 Fax: (713) 466-1703
E-Mail: customerservice@enconsafety.com



COMBINATION SHOWER/ EYE/FACEWASH W/PVC PIPING AND YELLO-BOWL[®]

PART NUMBER: 01060009

SPECIFICATION:

Third party certified to ANSI Z358.1, the combination shower and eye/facewash shall deliver 30 gpm (113.6 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from the shower head and 8.0 gpm (30.3 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from eye/facewash. Combination unit shall provide a non-injurious flow of water for 15 minutes or longer. Unit shall be supplied with corrosion resistant Polane[®] coated bronze single motion activation stay open ball valves with CP balls. Valve sizes: shower 1 1/2", eye/facewash 1/2". Unit shall include SS actuators with actuation graphics, schedule 80 corrosion resistant PVC piping and 1 1/2" supply/drain connection with flanged floor mounting plate for floor/wall supported installation. Shower shall be supplied with self-adjusting 30 gpm (113.6 lpm) regulator. Eye/Facewash to be supplied with 8.0 gpm (30.3 lpm) to assure a constant and even dual stream flow pattern under 30/70 psi (206.8/482.6 kPa) hydraulic conditions. Shower head to be manufactured of UV resistant high visibility yellow ABS plastic. Shower must deliver a minimum of 20" (50.8 cm) diameter pattern to the target area 60" (152.4 cm) above standing level. Eye/Facewash heads with float off covers to be manufactured of UV resistant ABS plastic mounted in a high visibility Yello-Bowl[®]. Eye/Facewash float off covers are secured with stainless steel bead chains and provided to inhibit dust and/or contamination when not in use. Combination units that provide improper flow pattern or contain deteriorating screens/filters are not acceptable. Combination unit shall be Encon Safety Products Model 01060009.

MATERIALS OF CONSTRUCTION:

PIPING: Schedule 80 corrosion resistant PVC piping and socket weld joints.

VALVES: Polane[®] coated bronze stay open ball valves with chrome plated ball, stainless steel valve stems, stainless steel push plate with actuation graphic (eye/facewash) and stainless steel pull rod assembly with actuation graphic (shower).

Valve sizes: shower 1 1/2", eye/facewash 1/2".

SHOWERHEAD: Yellow ABS plastic shower.

EYE/FACEWASH HEAD: ABS plastic dual stream heads with ABS plastic float off covers secured with stainless steel bead chains.


BOWL: High visibility ABS plastic Yello-Bowl[®].

REGULATOR: Self adjusting 30 gpm (113.6 lpm) shower and 8.0 gpm (30.3 lpm) eye/facewash regulators.

SUPPLY: 1 1/2" NPT

WASTE: 1 1/2" NPT

WEIGHT: 34 lbs (15.42 kgs)

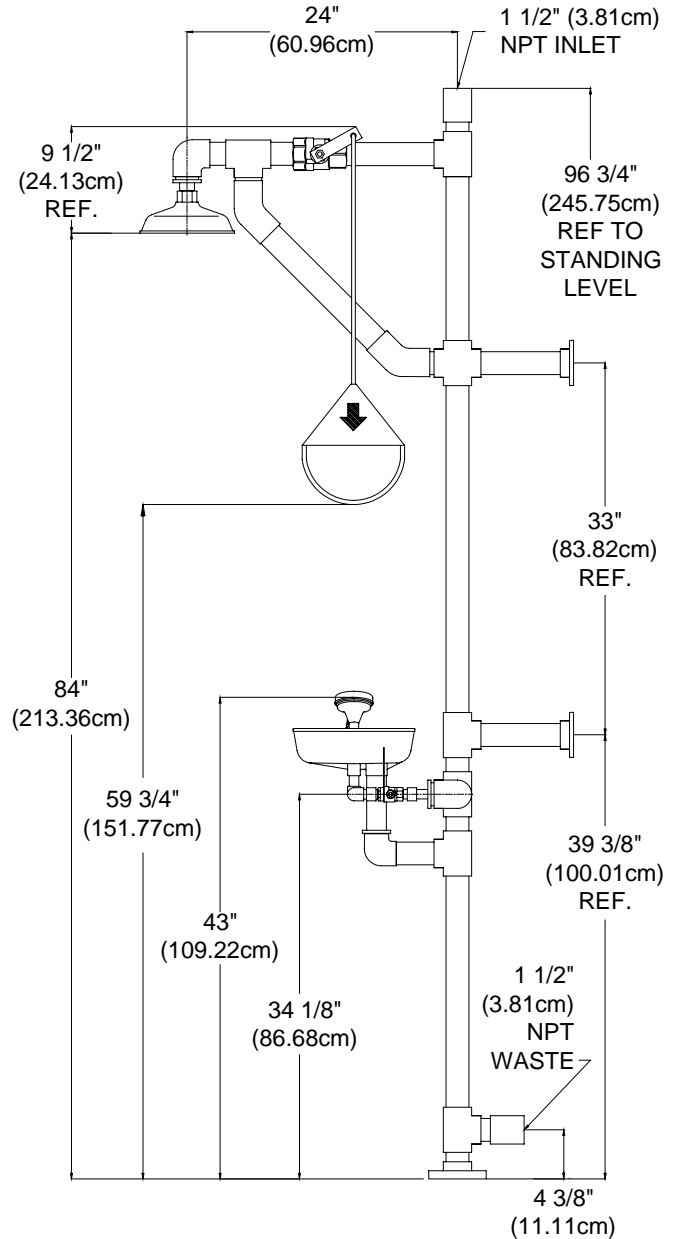

MODEL #	DESCRIPTION
01060009	Unit as Specified

Polane[®] is polyurethane enamel and a registered trademark of Sherwin Williams.