




**1-800-283-6266**  
 Phone: (713) 466-1449 Fax: (713) 466-1703  
 E-Mail: customerservice@enconsafety.com

# HORIZONTAL SHOWER WITH PVC PIPING

PART NUMBER: 01063001

**SPECIFICATION:**

Third party certified to ANSI Z358.1, the shower shall deliver 30 gpm (113.6 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure. Unit shall provide a non-injurious stream of water for 15 minutes or longer. Unit shall be supplied with 1½” corrosion resistant Polane® coated bronze single motion activation stay open ball valve with CP ball. Shower shall include SS actuator with actuation graphic, schedule 80 PVC piping, and 1½” supply connection. Shower head shall be supplied with self-adjusting 30 gpm (113.6 lpm) regulator to assure a constant flow and pattern under 30/70 psi (206.8/482.6 kPa) hydraulic conditions. Shower head to be manufactured of UV resistant high visibility yellow ABS plastic. Shower head must deliver a minimum of 20” (50.8 cm) diameter pattern to the target area 60” (152.4 cm) above standing level. Shower units that provide improper flow pattern are not acceptable. Shower unit shall be Encon Safety Products Model 01063001.

**MATERIALS OF CONSTRUCTION:**

**PIPING:** Schedule 80 corrosion resistant PVC piping and socket weld joints.


**VALVE:** 1½” Polane® coated bronze stay open ball valve with chrome plated ball, stainless steel valve stem and stainless steel pull rod assembly with actuation graphic.

**SHOWERHEAD:** Yellow ABS plastic shower.

**REGULATOR:** Self-adjusting 30 gpm (113.6 lpm) regulator.

**SUPPLY:** 1 ½” NPT

**WEIGHT:** 11 lbs (4.98 kgs)

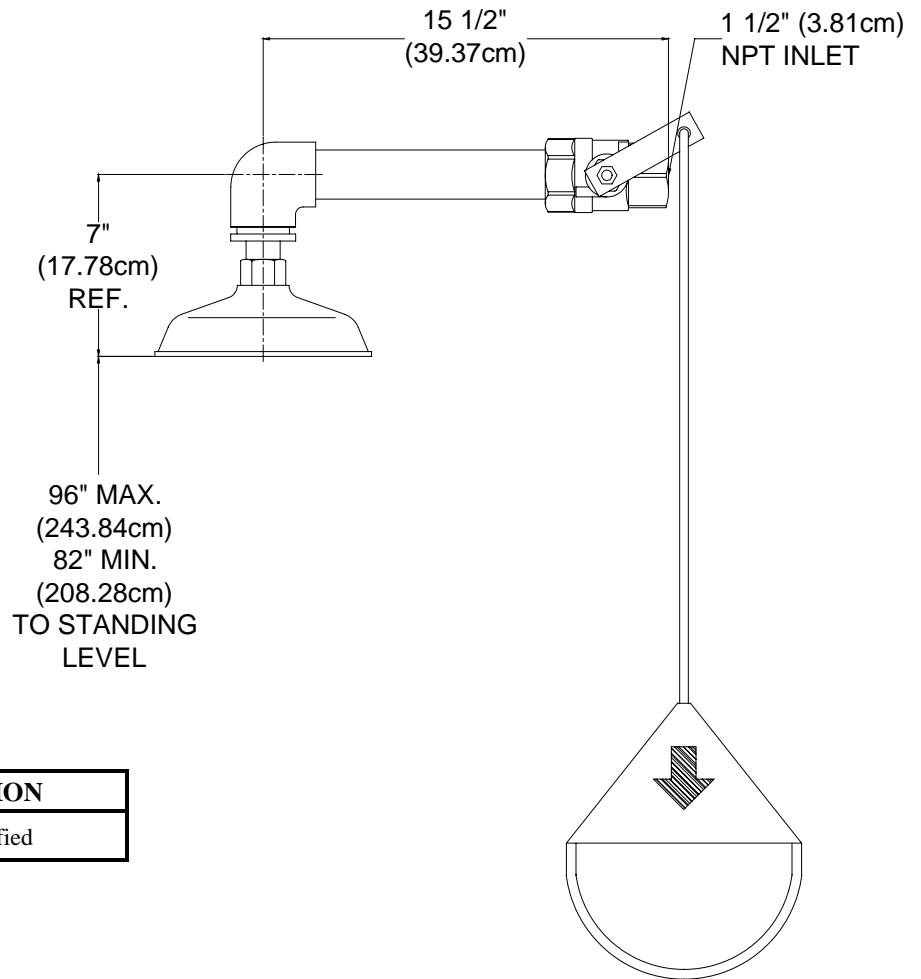

MODEL #	DESCRIPTION
01063001	Unit as Specified

Polane® is polyurethane enamel and a registered trademark of Sherwin Williams.